
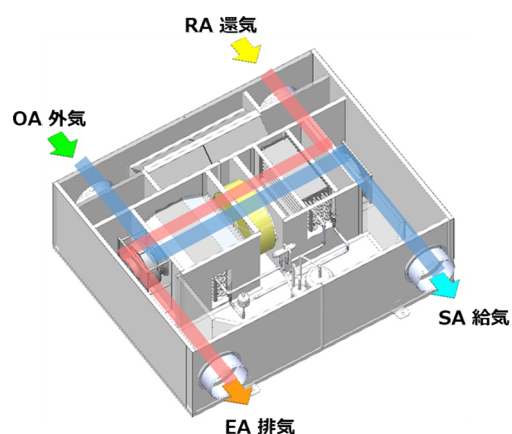


全熱交換ローター付デシカント空調システム(ヒートポンプ熱源)

クラス (風量)	型番	風量 (m ³ /h)	除湿量 (kg/h)	消費電力 (kW)	指標 (kg/h)/(kW)
4,000m ³ /h以下	DC-AEX-05	500	5.8	0.9	6.4
4,000m ³ /h以下	HEX-DC2-40EHP	4,000	50.5	4.3	11.7
4,000m ³ /h超 6,000m ³ /h以下	HEX-DC2-60EHP	6,000	76.1	5.9	12.9
6,000m ³ /h超 8,000m ³ /h以下	HEX-DC2-75EHP	7,500	94.9	7.6	12.5
8,000m ³ /h超 10,000m ³ /h以下	HEX-DC2-90EHP	9,000	113.7	9.7	11.7
10,000m ³ /h超	HEX-DC2-105EHP	10,500	132.8	11.5	11.5
10,000m ³ /h超	HEX-DC2-120EHP	12,000	151.3	13.2	11.5

注) 上記の試験はJIS B8638:2020に準じ運転したものです

DC-AEX-05

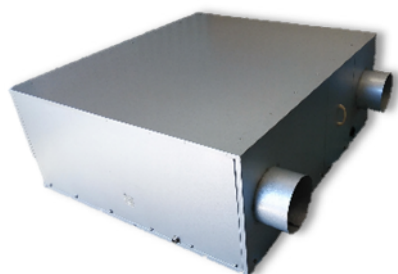

HEX-DC2-EHPシリーズ*

